

FENCING PRODUCTS

CATALOGUE

SAFE - SECURE - QUALITY FENCING



MCNAMARA FENCING | WALLSTOWN, CASTLETOWNROCHE, MALLOW, CO. CORK, IRELAND | WWW.MCNAMARAFENCING.IE

McNamara Fencing

FENCING PRODUCTS

CONTENTS

Close-Board Fencing

Flexible Rail Fencing	04	Superknot Stock Fence	17
Superknot Horse Fence	06	Field Gates	18
V-mesh Horse Fence	08	Driveway & Entrance Gates	20
Electric Horse Cable Fencing	10	Gate Accessories	22
Post & Rail Fencing	12	Paint / Creosote	23
McNamara DuraPosts	14	Electric Fencers & Accessories	24
Railway Sleepers	15	Insulator & Fence Accessories	25
Fence Tape	16	Installation Service	27

16

ABOUT US

Family owned and operated since 1988...

McNamara Fencing was established in 1988 by Jerry McNamara, near Mitchelstown, Co. Cork as a fencing and agricultural contracting business. Over the years it has grown into a leading supplier of highest quality, innovative fencing systems for Agricultural and Equestrian applications.

McNamara Fencing has been at the forefront of innovative fencing systems. In 1999, we installed the very first Electric Horse Cable in Ireland. in 2003, we introduced the 'Flexible Rail" horse fencing system to the Irish market and in 2009, we introduced our Superknot horse safe mesh. In 2014 McNamara Fencing introduced a range of stabling and accessories to complement our equine fencing

McNamara Fencing have a diverse and loyal customer base ranging from Farmers, Local Authorities, Fencing Contractors, Stud Farms and equestrian establishments from County Cork across Europe, and even to Africa and South America.

We look forward to your enquiry!



CONTACT US



ADDRESS WALLSTOWN CASTLETOWNROCHE MALLOW, CO. CORK **IRELAND**

TELEPHONE (IRL) 022 40723 TELEPHONE (UK/NI) 0845 4631757 **EMAIL** INFO@

McNAMARA FENCING | safe, secure, quality fencing IRL: 022 40723 UK/NI: 0845 4631757 E: info@mcnamarafencing.ie W www.mcnamarafencing.ie

5" FLEXIBLE RAIL SYSTEM



5" HIGH TENSILE RAIL SYSTEM


HIGH TENSILE RAIL SYSTEM

McNamara Fencing's Flexible rail system is a continuous flexible polyethylene rail with three high tensile steel wires embedded in the plastic to give strength to the rail.

This rail is a tensioned fence and acts like a belt around your paddock. The rail is attached to wooden posts with steel brackets, which allow the rail to move in and out when pressure is applied to the Rail at any point along the fence line.

RECOMMENDED POSTS

CODE	DESCRIPTION	
CP2112	Creo. DuraPost: 2.1m x 12cm	Round Line Post
CP2514	Creo. DuraPost: 2.5m x 14cm	Round turning Post
CP2518	Creo. DuraPost: 2.5m x 18cm	End/Straining Post
CS2710	Creo. Strut: 2.7m x 10cm	Support Strut
CP2520	Creo. DuraPost: 2.5m x 18cm	End/Straining Post



Bracket system allows fence rail to flex in event of impact and cushion any impact without damaging the fence.

FEATURES

- 1.8 tonnes breaking strength ensures that no animal will get through the fence
- Easily re-tensioned if required
- No painting required
- Extremely durable: withstands cribbing, kicking and is UV stabilized
- Black, Brown or white colours available

RAIL ROLLS

CODE	DESCRIPTION	LENGTH
FR5200 (BLK, WHT, BRN)	Flex Rail: 5": Black	200m
FR5100 (BLK, WHT, BRN)	Flex Rail: 5": Black	100m







RAIL ACCESSORIES

INLINE TENSIONER

Tensioners are used to tension the Rail. To tension the rail, simply insert 2 ratchet drives into the top and bottom of the Tensioner and rotate. Tensioners should be placed every 100 metres along the Rail. Tensioners are a permanent fixture of the fence and can be used anytime to re-tension the fence.

CODE: FR5S

JOINING BUCKLE (SPLICER)

Used to join one length of rail to another, without compromising the strength of the rail. CODE: FR5JB

END BUCKLE & SCREW

Attaching buckles
are used to attach
the Rail to an End/
corner post. Buckle is
fastened to End post using a Hot-dip
galvanised coach screw. CODE: FRSEB

LINE POST BRACKETS

Steel Brackets hold the Rail on to the fence post using 2 galvanised nails or screws. CODE: FRB5



INSIDE CORNER BRACKET

Use where the rail is pulling away from the post. Useful for corners of Arenas etc. CODE: FRSICB

SUPERKNOT™ HORSE FENCE





Maximum Safety

- Very close (50mm) vertical wire spacing and (100mm)
 horizontal wire spacing minimise chances of hoofs getting
 entangled in the fence.
- Springy texture provides safety in the event of an animal colliding with the fence.
- Unique Superknot™ joint has no sharp edges and ensures vertical wires cannot be moved by livestock.
- Strong, Long Lasting & Low Maintenance.
- Manufactured using 2.5mm High tensile wire throughout, which allows for longer intervals between posts and a stronger self supporting fence.
- Galvanised to BS EN 10244 Class A.

Extremely Versatile

Superknot™ Horse Fence allows pastures to be stocked with any type of animal with total peace of mind, while keeping unwanted wildlife/dogs out. Many customers choose the 90cm high to cover existing Post and Rail fences.

Strong Smooth Joint

Durable Superknot™ joint ensures fence wires cannot be pushed out of place by stock. It is smooth with no sharp edges.







SIZES AVAILABLE

CODE	HEIGHT	VERTICAL SPACING	HORIZONTAL SPACING
SKHT10/90/5	36" / 90cm	2"/5cm	4"/10cm
SKHT13/122/5	48" / 123cm	2"/5cm	4"/10cm
SKHT14/130/5	50" / 130cm	2"/5cm	4"/10cm
SKHT16/152/5	60" / 152cm	2"/5cm	4"/10cm
SKHT19/180/5	72" / 180cm	2"/5cm	4"/10cm

V-MESH CLASSIC STUD FARM FENCING

FEATURES

The fence of Choice worldwide for safe containment of high value bloodstock.

Very close 2" (50mm) vertical wire spacing and 4" (100mm) horizontal wire spacing with verticals woven in a v formation minimises the chances of a hoof getting entangled.

Springy texture provides safety in the event of an animal colliding with the fence. Smooth texture without sharp edges.

Allows pastures to be stocked with any type of animal with total peace of mind, while keeping unwanted wildlife/dogs out.



FENCING ROLLS

CODE	DESCRIPTION	HEIGHT	LENGTH
VMESH	V-mesh	50"/1.27m	50m

COMPONENTS

CODE	DESCRIPTION	
CRIMPSLEEVE	Crimp Sleeve: Pack of 50	13 required for joining
CRIMPTOOL	Crimping Tool	
BRACE	Brace Plate	

RECOMMENDED POSTS FOR 1.35M HIGH FENCE

CODE	DESCRIPTION	
CP2112	Creo. DuraPost: 2.1m x 12cm	Round Line Post
CP2514	Creo. DuraPost: 2.5m x 14cm	Round Turning Post
CP2518	Creo. DuraPost: 2.5m x 18cm	End/Straining Post
CS2710	Creo. Strut: 2.7m x 10cm	Support Strut
CP2520	Creo. DuraPost: 2.5m x 18cm	End/Straining Post







CLAW STRAINING TOOL

Handy tool for Straining Short runs of wire.

WIRE CUTTER

Economy Cutter
CODE: WIRECUTTER
Professional Cutter - Felco
CODE: FELCO

JOINER TENSIONING TOOL

Use with Joiner/
Tensioner. This
handy Tool
enables short stretches
(<100m) of Mesh to be
tensioned by pushing the
Joiner/Tensioners along
the fence.

MESH FENCING ACCESSORIES



TYING OFF CLI

Convenient system of tying off wire at your End Post. Not Suitable For V-mesh.

CODE: TCLIP

FASTLOK JOINER/ TENSIONER



Join your Superknot with these convenient joiners. Just push your wire into the joiner and it locks! No need for tying. The Fastlok can also be used to tighten your Superknot when used in conjunction with

the Tensioning Tool. CODE: FASTLOK

4

CRIMP SLEEVES

Used to Join V-mesh Rolls together.

CODE: CRIMPSLEEVE



CRIMP TOOL

Required to apply Crimp sleeves to wire.

CODE: CRIMPTOOL

BARBED STAPLES

High Quality Staples for Mesh to wooden line posts.



40mm x 4mm size

5 kg Box CODE: STAPLE40x4x5kg 20 kg Box CODE: STAPLE40x4x20kg

MESH STRAINING CLAMP

Tension your Mesh evenly using a straining clamp. Grabs all the horizontal wires together for an even pull.

·Use with optional Straining clamp Pullers

·Available in 1.2m, 1.5 or 2.0m heights Available to Rent

CODE: FKCLAMP (4,5,6)

CODE: SCLAMP

STRAINING

Clamn

CLAMP PULLERS

·Used to pull the Straining

·6 metre chain with hook

·Available to Rent

ELECTRIC

HORSE CABLE SYSTEM

- STRONG & DURABLE
- VIRTUALLY MAINTENANCE FREE
- PERMANENT SOLUTION

SAFE

Electric Horse Cable was designed from the outset to be a safe fence for horses. Due to it's high-tensile steel core the fence reduces the chance of the fence 'wrapping around" your horses should they impact it. Smooth Polymer coating protects the horse's skin from abrasions or grazes.

ELECTRIFIED

Electric Horse cable is conductive making it also suitable for holding cattle and because the fence is electrified animals will not abuse the fence.

STRONG

Electric Horse Cable's minimum breaking strength is 635 kgs

PERFECT AS A STANDALONE FENCE

Electric Horse cable is perfect as a standalone fence with 1 or more strands of cable. Electric Horse cable is also available in Black making it ideal perfect for electrifying existing post and rail fences.

SPECIFICATIONS

Total Diameter: 8mm Steel Core: 2.5mm High Tensile wire galvanised to BS 10244 Class A





Flexible Rail with 2 Strand Electric Horse Cable combination fence.





ACCESSORIES

LARGE CLAW INSULATOR

Heavy Duty Insulator: Insert/Remove Cable at 45 deg angle. Black or White colours available. Pack of 25 or 200 Black CODE: LBCI (25, 200) | White CODE: LWCI (25, 200)



PINLOCK INSULATOR

Heavy duty insulator. Removable Pin. Attaches to line posts using galvanised staples, nails or screws. Pack of 25. CODE: LWPI



IOINER TORPEDO

Joins 2 lengths of cable quickly and easily. Just strip back the plastic from the cable and push in the wire and it locks tight. CODE: TORPEDO



END STRAIN INSULATOR

High Strain End Insulator. Pack of 25 CODE: SREI




INSULATED RATCHET STRAINER

Used to tension the cable. Attaches to the end post using wire and is also insulated. CODE: IRS

INSULTUBE 30M ROLL

Insulating Tube for corner posts/ at corners. Black or White Colours. CODE: INSULTUBEEHC (BLK, WHT)

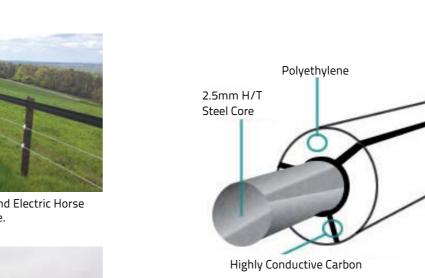

Electric Horse Cable is a polyethylene coated 2.5mm high tensile steel wire with multiple strips of conductive carbon carrying the electrical current from the wire to the surface

CODE	DESCRIPTION	LENGTH
EHC350W	Electric Horse Cable: White	350m
EHC350B	Electric Horse Cable: Black	350m
EHC350BR	Electric Horse Cable: Brown*	350m



POST & RAIL FENCING



CALL TODAY
TO DISCUSS YOUR T: 022 4072

Superior Timber

 McNamara Fencing's Post and Rail Fencing is manufactured from imported Redwood (pine), Larch and Douglas Fir only. These species are naturally more durable than native timbers and retain higher levels of

Superior Treatment

• McNamara Fencing's Post and Rail Fencing is preserved to the Highest Standards. Before undergoing Pressure Treatment, our timber is dried to low moisture content. Only then is the timber pressure-treated with Genuine Coal Tar Creosote or where creosote is not suitable Waterborne preservatives can be specified also.

Suitable for Horses

 Unlike other Preservatives, Pressure-Creosoted timber does not contain salt and is therefore unpalatable for horses to crib. It is the only suitable Post & rail option for Horse Paddocks, Arenas or Lunging Rings.



Posts, Rail & Accesories

POSTS

CODE	DESCRIPTION	LENGTH	WIDTH	THICKNESS
CP1815075	For fences up to 1.2m	1800	150	75
CP19515075	For fences up to 1.35m	1950	150	75
CP2115075	For fences up to 1.5m	2100	150	75
CP2415075	For Arenas, Lunging rings	2400	150	75
CP2715075	For Arenas, Lunging rings	2700	150	75
CP3015075	For Arenas, Lunging rings	3000	150	75

GATE POSTS

CODE	DESCRIPTION	LENGTH	WIDTH	THICKNESS
CP241515	Gate Post	2400	150	150
CP241818	Gate Post	2400	175	175
CP242020	Gate Post	2400	200	200
CP2720	Horse Safe Round Gate Post	2700	200 dia.	-

RAILS

CODE	DESCRIPTION	LENGTH	WIDTH	THICKNESS
CR4810047	Standard Rail	4800	100	47
CHRR5120	Half Round Rail	5000	120 dia.	-
CR4822548	Kickboard / Gravel Board	4800	225	47
CR5417538	Top Rail for Mesh Applications	5400	175	38

SCREWS

Code	Description
GD-25	Exterior Wood Screw: 2.5": Box of 350
GD-35	Exterior Wood Screw: 3.5": Box of 350

13

MCNAMARA

DURAPOSTS

TIRED OF REPLACING ROTTING WOODEN POSTS? CHOOSE THE HIGH QUALITY ALTERNATIVE... DURAPOSTS

In recent years, the problem of failing farm fencing posts has become particularly common. From more than 28 years experience in the fencing business, McNamara Fencing has learned which posts last and which ones don't.

McNamara Fencing DuraPosts are manufactured from imported European Larch, Scot's Pine and Douglas fir. These species are naturally more durable and retain more preservative than Native whitewood (Spruce). They are strictly dried to low moisture content and only when dry enough, they are Pressure treated with Genuine Coal Tar Creosote for maximum penetration.

Duraposts are treated using Genuine Coal Tar Creosote (which contrary to popular belief is still available for Commercial and Agricultural use) as it is the oldest and most reliable wood preservative available as evidenced by its usage in Electricity poles across the country.

Sizes Available - We stock a broad range of sizes and diameters in both peeled and machined round finshes. Call us for details.



NSAI specification IS437:2007

OAK RAILWAY **SLEEPERS**

NATURALLY DURABLE HARDWOOD

Oak is a naturally durable hardwood that is suitable for ground contact application without any chemical preservatives. This makes it very suitable for applications where children or plants may be in contact with the sleepers.

OPTIONAL PRESSURE TREATMENT

We can also supply these sleepers pressure treated with water-borne preservative where extended life is required or pressure creosoted for maximum life expectancy in nondomestic applications.



CODE	LENGTH	WIDTH	THICKNESS	TREATMENT
SLEEPERM2.4	2.4m	200mm	200mm	Untreated
SLEEPERMT2.0	2.4m	200mm	200mm	Pressure Treated with Impralit KDS

SI FFPFR SCRFWS

CODE	DESCRIPTION
TL4-50	4" Hex Head
TL6-50	6" Hex Head
TL8-50	8" Hex Head
TL10-50	10" Hex Head





FIELDMASTER FENCE TAPE

- WIDER WEAVE, ALLOWS WIND TO BLOW THROUGH
- STAINLESS STEEL STRANDS WON'T DEGRADE OVER TIME UNLIKE COPPER STRANDS
- 7 YEAR GUARANTEE AGAINST UV DAMAGE
- 40MM OR 20MM WIDTHS AVAILABLE
- BLACK, BROWN AND WHITE COLOURS AVAILABLE

RECOMMENDED POSTS

	20MM	40MM
Stainless Steel Strands	5 x 0.4mm SS	10 x 0.4mm
HDPE Strands	16 x 0.5mm HDPE	32 x 0.5mm
Edges	2 x 0.9mm	2 x 0.9mm
	Reinforced Polyester Edges	Reinforced Polyester edges
Roll Length	250m or 500m	250m or 500m
Resistance	1.7 Ω/m	0.85 Ω/m
Breaking Strain	205kg	330kg
Colours available	Brown, Green, White	Brown, Green, White

CLOSE BOARD **FENCING**

VERTICAL BOARDING

CODE	HEIGH (M)	WIDTH (MM)	THICKNESS
CB1515025	1.5	150	25
CB1815025	1.8	150	25

CAPPING

CODE	LENGTH (M)
CCR	4.8

GREAT FOR
YARDS, ARENAS,
LUNGEING RINGS
& MORE

SKELETON POST & RAIL

CODE	DESCRIPTION
CP19515075	Creo. DuraPost: 1.95m x 150mm x 75mm
CP4810047	1Creo Rail: 4.8m, 100mm x 47mm



THE HIGHEST

THE MARKET

BAR NONE

QUALITY ELECTRIC

FENCE TAPE ON



SUPERKNOT™ STOCK FENCE

THE STRONGEST, MOST ROBUST AND LONGEST LASTING STOCK FENCE AVAILABLE!

Superknot™ Stock fence is constructed using the unique 'Superknot'. This revolutionary knot fixes the vertical wire in place ensuring that it cannot be moved out of place by stock.

The Superknot also allows for wider spaces between the vertical wires as there is no danger of stock putting their heads between the verticals and moving them out of place.

This feature gives the fence far greater vertical rigidity than conventional stock fence.

The Superknot is smooth, with no sharp edges that could damage an animal's hide or fleece.

REQUIRES FEWER POSTS

Unlike traditional stock fence, Superknot Stock fence is constructed with a single uncut vertical wire. This construction allows the vertical wire to act like a batten and supports the horizontal wires.

This allows Superknot to be installed with up to 50% fewer posts than traditional High Tensile stock fencing.





CODE	HEIGHT	VERTICAL WIRE SPACING	HORIZONTAL WIRE SPACING	WIRE SIZE	STD ROLL LENGTH
Sheep/Livestock					
SKHT8/80/15	80cm/32"	15cm/6"	Graduated	2.5mm HT	100m
SKHT8/80/22	80cm/32"	22cm/9"	Graduated	2.5mm HT	100m
SKHT8/80/30	80cm/32"	30cm/12"	Graduated	2.5mm HT	100m
Deer Fencing					
SKHT13/190/15	190cm/75"	15cm/6"	Graduated	2.5mm HT	100m

FIELD GATES



GALVANISED HEAVY DUTY GATE

Standard Height: 4'. (5' & 6' Versions made to order.)

Single Gates available up to 20', Double Gates up to 40'

Custom Widths made to order.

CODE: GHG



Standard Height: 4'. (5' & 6' Versions made to order.)
Single Gates available up to 20', Double Gates up to 40'
Custom Widths made to order.

CODE: GSG





GALVANISED MESH GATE

Standard Height: 4'. (5' & 6' Versions made to order.)
Single Gates available up to 20', Double Gates up to 40'
Custom Widths made to order.

CODE: GMG



WOODEN PADDOCK GATE

4' HIGH

Attractive Field gate manufactured from imported Scandinavian Redwood (Pine). Pressure treated for longevity . Assembled using Stainless Steel fasteners.

Standard Height: 4'. (5' & 6' Versions made to order.)

Single Gates available up to 12', Double Gates up to 40' .

Custom Widths made to order.

Optional Heavy Bottom Rail.

CODE: GTP






DRIVEWAY & ENTRANCE

GATES

ALL GATES ARE MADE FROM IMPORTED KILN DRIED REDWOOD, CONSTRUCTED USING MORTISE AND TENON JOINTS AND STAINLESS STEEL FASTENERS. GATES ARE PRESSURE TREATED AFTER FABRICATION.








Annagh Gate

Barrow Gate











Finn Gate

Fergus Gate

Mourne Gate

Corrib Gate









Foyle Gate

Erne Gate


Glen Gate

Ranch Gate







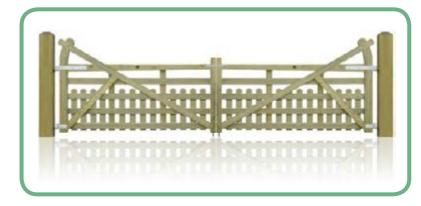

Boyne Gate

Carrick - Single sided Driveway Gate

Closed Ranch Gate

TIMBER GATES HANGERS & ACCESSORIES



FIELD GATE HINGE SET

Hot Dipped Galvanised For Timber Posts Only. CODE: HANGS



FIELD GATE HINGE SET ON ADJUSTABLE PLATES

Hot Dipped Galvanised For Concrete or Wooden Piers. CODE: HANGAS



FIELD GATE SHOOT BOLT



18" DROP BOLT

CODE: GMGDBOLT



THROWOVER LOOP CODE: LOOP

HORSEBACK SPRING FASTENER CODE: SPRINGFASTENER

STEEL GATE HARDWARE





VERTICAL GATE HANGER



STEEL POST



RSJ GATE **HANGER**

GATE POSTS

PRESSURE CREOSOTED CP241515 2.4m x 150mm x 150mm CP241818 2.4m x 175mm x 175mm CP242020 2.4m x 200mm x 200mm

PRESSURE TREATED TANALISED CODE TP241515 2.4m x 150mm x 150mm TP241818 2.4m x 175mm x 175mm TP242020 2.4m x 200mm x 200mm

GOESOL FENCE, STABLE & BARN

PAINT

- SPECIALLY FORMULATED FOR POST & RAIL FENCES & **EQUINE/AGRICULTURAL APPLICATIONS**
- SAFE FOR HORSES & LIVESTOCK
- LEAD FREE
- 3-6 YEAR PROTECTION
- SOAP & WATER CLEANUP
- CAN BE USED ON WOOD, CONCRETE AND EVEN STEEL!
- BRUSH, ROLLER OR SPRAY APPLICATION



TRADITIONAL **CREOSOTE**

- FOR PROFESSIONAL USE ONLY.
- AVAILABLE IN 20L AND 200L DRUMS
- 100% GENUINE COAL TAR CREOSOTE
- THE WORLD'S OLDEST AND MOST RELIABLE **WOOD PRESERVATIVE**



ELECTRIC **FENCERS**

POWERFUL, RELIABLE FENCERS MADE IN CARLOW. **IRELAND SINCE 1973!**

2 YEAR MANUFACTURERS WARRANTY ON ALL CHEETAH FENCERS

MAINS



MODEL: M15 MODEL: E2 **OUTPUT JOULES: 1 OUTPUT JOULES: 2.5** CODE: CHETAE2



MODEL: SUPER MODEL: M60 **OUTPUT JOULES: 7 OUTPUT IOULES: 15 CODE: CHETASUPER** CODE: CHETAM60



MODEL: G303 OUTPUT JOULES: 30 CODE: CHETAG303





BATTERY 12V

MODEL: HV12 **OUTPUT JOULES: 1 BATTERY LIFE:** 2/4 WEEKS FAST & **SLOW PULSE RATES** CODE: CHETAHV12



MODEL: **B1-11 OUTPUT IOULES: 2** BATTERY LIFE: 2/4 WEEKS FAST & **SLOW PULSE RATES** CODE: CHETAB111

BATTERY 9V & 7.5V



MODEL: **B40 OUTPUT JOULES: 0.18 BATTERY LIFE:** 4 MONTHS 2 OUTPUT LEVELS

CODE: CHETAB40



MODEL: **B40 OUTPUT JOULES: 0.18 BATTERY LIFE:** 4 MONTHS 2 OUTPUT LEVELS CODE: CHETAB40



MODEL: **B40 OUTPUT JOULES: 0.18 BATTERY LIFE:** 4 MONTHS 2 OUTPUT LEVELS CODE: CHETAB40

ELECTRIC FENCER ACCESSORIES

1 METRE EARTH BAR

T-Shape for maximum surface contact.



Use to switch current on or off independently of the Fencer unit.

Useful for isolating parts of your farm to keep voltage up.



Hi Intensity Light that begins to flash when fence voltage goes



FAULT FINDING VOLTMETER


Pinpoints where your fence is earthing out. Gives very accurate voltage readings.



LEAD OUT CABLE

Used to connect your Fencer to your Fence wire and earthing system and/ or bringing power under Gates/Gaps or roadways:

- 1.6mm x 10m roll
- 2.5mm x 50m roll
- 2.5m x 200m roll



Shows voltage up to

FENCE TESTER

LIGHTNING

installed indoors.

Essential where Fencers are

ELECTRIC FENCE WARNING SIGN



INSULATORS FOR 2.5MM STEEL WIRE

WHITE END STRAIN INSULATOR

Glass Fibre Reinforced insulator: Suitable for high strain applications. Pack of 25 CODE: SREI

PORCELAIN END STRAIN **INSULATOR**



Stronger and longer lasting than Plastic Insulators. Ideal for high tensile applications. Pack of 10 CODE: PORCELAIN10

WOODPOST PINLOCK INSULATOR

Strong UV Stabilised, suitable for 2.5mm High Tensile Wire. Pack of 25 CODE: PINLOCK

WOODPOST CLAW INSULATOR

Strong & UV Stabilised. Suitable for up to 2.5mm HT wire. Pack of 25 CODE: PATCI25

Pack of 200 CODE: PATCI200

SCREW IN INSULATOR



UV Stabilised. Galvanised Screw that reinforces the Plastic Insulator, CODE: SCREWIN

100MM INSULTUBES WITH STAPLE

100 Tubes & Staples per pack CODE: INSULTUBESTAPLE



HEAVY DUTY STAPLE-ON INSULATOR

Bag of 50 with staples.



HD INSULTUBE: 2M LENGTH

Heavy Wall Insultube for 2.5mm wire.

10" OFFSET PIGTAIL OUTRIGGER

250mm Offset Pigtail Outrigger. Made with Durable Spring Steel for maximum impact resistance.

INSULATORS FOR ELECTRIC TAPE

TAPE LINE POST INSULATOR

- Suitable for all tapes up to 40mm width
- Clamps the Tape
- **UV** Stabilised

Tape Joiner

- Stainless Steel
- Best connection for Tape
- 20mm Version
- 30-40mm Version
- Packs of 5



Tape Strain Insulator

- Stainless Steel Connector Plate
- Suitable for up to 40mm Tape

Gate Handle Connector Plate

Suitable for tapes up to 40mm

FENCE TENSIONERS

INSULATED RATCHET STRAINER (NEW VERSION)

- Hot dipped Galvanised
- Insulated Bobbin CODE: IRS



Inline Fence Tensioner

- Aluminium
- NZ made
- Use with Handle



Inline Tensioner Handle

• Use to rotate the Fence Tensioner

25

GATE BREAK HANDLES



ECONOMY HANDLE
CODE: ECONOMYHANDLE

SPRING GATE KIT

- 5m Spring
- Not Recommended for Horses

CODE: SPRINGGATE



REPLACEMENT SPRINGS FOR HD HANDLE

• Box of 10

HEAVY DUTY SPRING HANDLE

- Virtually Unbreakable Body
- Replaceable Spring

CODE: HDGATEHANDLE



BUNGY GATE KIT

- 5m Electric Bungy Cord
- Activator & Gate Handle included
- Not Recommended for Horses





FENCE FASTENERS



Barbed Staple

- 4.0mm x 40mm: 5kg tub CODE: STAPLE40x4x5kg
- 4.0mm x 40mm: 20kg tub CODE: STAPLE40x4x20kg
- 4.0mm x 50mm: 5kg tub CODE: STAPLE50x4x5kg
- 4.0mm x 50mm: 20kg tub
 CODE: STAPLE50x4x20kg



Plain Staple

- 3.0mm x 30mm: 1kg box CODE:
- 4.0mm x 40mm: 1kg tub CODE: STAPLE40x4x5kg
- 4.0mm x 40mm: 20kg tub
 CODE: STAPLE40x4x20kg

Exterior Wood Screws

Manufacturer Lifetime Warranty. Pozi Head.

- 2.5" Box of 350 CODE: GD25
- 3.5" Box of 350
 CODE: GD35

Galvanised Nails

- 100mm x 1kg CODE: NAIL1KG
- 100mm x 20kg
 CODE: NAIL20KG

GALVANISED STEEL WIRE

	CODE	DESCRIPTION
	PWHT25	Plain wire: 2.5mm dia., High Tensile: 25kg Roll: (ca.620m)
	PWMS25	Plain wire: 2.5mm dia., Mild Steel: 25kg Roll: (ca.620m)
	BARBED2.0HT	Barbed wire: 2.0mm; High tensile



PLANNING & INSTALLATION SERVICE

McNamara Fencing offer a full planning andinstallation service. We can advise and design a fencing system to suit your individual needs and budget, supply the necessary materials at best prices and if you want we will erect the fence for you.

Using state of the art equipment and highly trained staff, McNamara Fencing's installation service is second to none. Our professional and experienced installation staff are highly trained and regularly liaise with fencing manufacturers to ensure we have the most

up-to-date and best methods of installation.



STABLING & STABLE ACCESSORIES







McNamara Fencing also supply a line of Stabling and Stable Equipment.

CALL TODAY
TO DISCUSS YOUR
REQUIREMENTS
T: 022 40723





Republic of Ireland T: 022 40723

United Kingdom / Northern Ireland

T: 0845 4631757